

ECHO 28

Expandable gas and flame monitoring panel

Flexible wall mount controller
Continuous monitoring of toxic
and/or combustible gases

The ECHO 28 is a wall mount control panel offering a cost effective solution for light industrial applications. The unit combines ease of installation with an intuitive interface giving low cost maintenance.

Easy installation

The base level Echo 28 is a 4 channel controller, expandable to 28 using quad channel extension boards

System configuration is achieved using a keypad and a friendly user interface.

Flexibility

The ECHO 28 controllers can be interfaced with all SIMTRONICS detectors: combustible gas detectors (4-20 mA), toxic gas detectors (for hazardous areas or not) with 2 or 3 wires and flame detectors. They are also designed to interface with third party products having 4-20 mA or relay outputs.

The ECHO 28 provides the following outputs, as standard. 4 adjustable alarm thresholds per channel, Modbus output, configurable relays (zoning).

Applications

The ECHO 28 is ideal for light industrial or service sectors applications, such as:

- Laboratories
- Chemical plants
- Solvent storage
- Industry

Features

Wall mounted unit

ModBus interface

Integral buzzer

Configurable relays

8 relay expansion module

High power relays

Expandable from 4 to 28 channels

Benefits

Self contained, no cabinet or rack

Data handling processed by PLCs


No need for additional sounder

Flexible outputs for third party interfaces

Additional flexibility to third party systems

Optional control of flashing beacons, sounder beacons or solenoid valves

Fitted to any kind of configuration

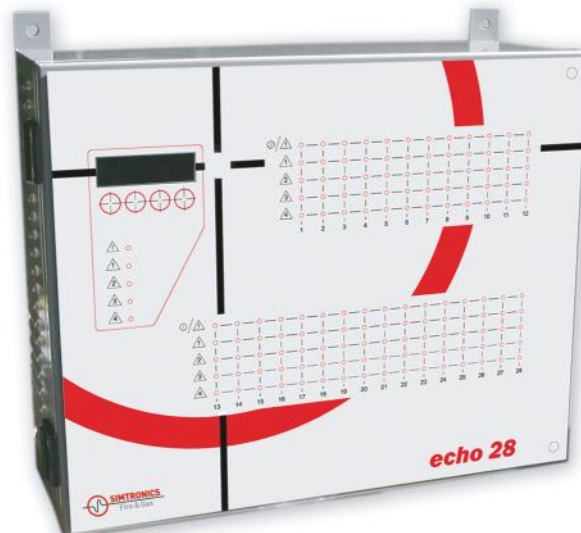

Technical data

GENERAL

Mounting	Wall mounted enclosure
Inputs	4-20mA or half-bridge

PERFORMANCES

Capacity	4 channels as standard Expandable to 28 channels with additional quad channel modules
Display	Digital LCD with back-lit screen - Number of channels - Measured value - Units
LED display	- Green: operational - Red: high and low alarms - Yellow: fault or alarm check
Mesaurement ranges	Configurable - ppm, %LEL, %Vol., others
Alarm thresholds	4 upper and lower alarm levels by measurement channel
Keyboard	Test key (check of the controller sounder and visual devices) - Acknowledge key
Buzzer	integral

OUTPUT SIGNAL


Relay outputs	5 integral relays - 1 general fault - 4 configurable alarm relays
Relay rating	230 V AC - 2A; 125 VAC - 2A
- Option	8 relay expansion module (max. capacity 64 configurable relays, max. distance between controller and relay module 2km)
Digital output	RS232 ModBus
- Option	RS485
Remote acknowledge function	

ELECTRICAL

Power supply	230 V AC 50-60Hz / 1.6A 110 V AC 50-60Hz / 3.2A (upon request) 24 V DC (24 to 28VDC); minimum 6 A
- Option	Integral battery back-up

ENVIRONMENTAL

Temperatures	
- Storage	-20°C to +50°C
- Operational	0°C to +45°C
Humidity	90% RH (non-condensing)

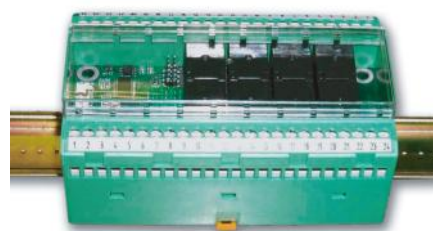

8 relay expansion module

HOUSING

Wall mounted	430 x 350 x 160 (l, w, d)
Connection	Cable gland + terminal block

APPROVALS

Conformities	
LOW VOLTAGE 73/23 CEE, 93/68 CEE directive and ATEX directive	EN 61779-1:2000, EN 61779-4:2000, EN 61779-5:2000, CEI EN 60065 (Ex CEI 1213), CEI EN 60335-1
ELECTROMAGNETIC COMPATIBILITY 89/336CEE directive	EN 50081-1, EN 50082-1

REFERENCES AND OPTIONS

ECHO-28	Expandable 4 channel controller
MOD4V	4 channel expansion module
BATTECHO28	Optional integral battery back-up
MOD8R	8 relay expansion module

OTHER PRODUCT

ECHO-2/4	2 or 4 channel controller
ET08	Toxic gas detector
E008	Oxygen depletion detector
EX05	Combustible gas detector
ECHO-SAMSYS	Sampling detection unit CO/N0 ₂ for car parks